



By doing business with

Atlas Steel - P.n.a

you're supporting PNG!

59 Rolled Formed Products

Atlas Steel PNG offers a premium range of steel products for roofing, walling, decking, and structural applications. Our roofing profiles include Custom Orb, Trimdek, Kliplik, and V Crimp, providing versatile solutions to suit any building design. For walling and cladding, we supply Weatherboards, while our Bondek decking delivers durable floors and slabs. Additionally, we manufacture purlins to provide essential structural support.

All our roofing, walling, and cladding profiles are made from genuine COLORBOND® and ZINCALUME® steel, ensuring long-lasting durability, corrosion resistance, and enduring visual appeal, perfectly complementing our roofing range.




Custom Orb-Zincalume



Trimdek-Colours



V Crimp-Colours

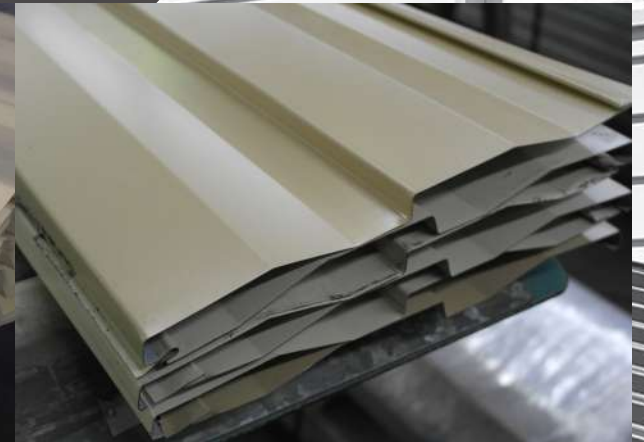


Weatherboard-Colours

Custom Orb


Available Standard:

AS 1397 : 2011 G300 / G550 Coating AZ150.
AS/NZ 2728 : 2013 AS1397:2011 G550 Coating AZ150

Application: Roofing and Wall Cladding
Finishes available: ZINCALUME® steel and limited COLORBOND® steel colours
BMT: 0.35, 0.40, 0.48 and 0.55mm

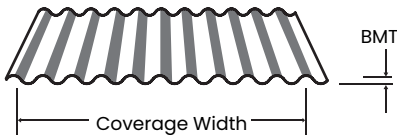

ZINCALUME® Custom Orb



COLORBOND® Custom Orb:
Digicel Red

CUSTOM ORB				
CODE No.		SIZE	UNIT WEIGHT	UOM
10-05-040	ZINCALUME®	0.40mm x 760mm	3.12	Meter
10-05-048		0.48mm x 760mm	3.70	Meter
10-05-051		0.40mm x 760mm x 1.800m	5.61	Each
10-05-052		0.40mm x 760mm x 2.100m	6.54	Each
10-05-053		0.40mm x 760mm x 2.400m	7.48	Each
10-05-054		0.40mm x 760mm x 2.700m	8.41	Each
10-05-055		0.40mm x 760mm x 3.000m	9.35	Each
10-05-056		0.40mm x 760mm x 3.300m	10.28	Each
10-05-057		0.40mm x 760mm x 3.600m	11.21	Each
10-05-058		0.40mm x 760mm x 3.900m	12.15	Each
10-05-059		0.40mm x 760mm x 4.200m	13.08	Each
10-05-060		0.60mm x 760mm	3.70	Meter
10-05-061		0.40mm x 760mm x 4.500m	14.02	Each
10-05-062		0.40mm x 760mm x 4.800m	14.95	Each
10-05-063		0.40mm x 760mm x 5.180m	16.14	Each
10-05-064		0.40mm x 760mm x 5.490m	17.10	Each
10-05-065		0.40mm x 760mm x 5.790m	18.04	Each
10-05-066		0.40mm x 760mm x 6.100m	19.00	Each
10-10-0XX	COLORBOND®	0.40mm x 760mm	3.16	Meter
10-10-09X		0.35mm x 760mm	2.79	Meter
10-20-0XX		0.48mm x 760mm	3.73	Meter
10-40-0XX		0.55mm x 760mm	4.27	Meter


Note: COLORBOND® Custom Orbs all lengths are Custom Made.

Trimdek


Available Standard:

AS 1397 : 2011 Grade G300 / G550 Coating AZ150.
AS/NZ 2728 : 2013 AS1397 : 2011 G300 / G550 Coating AZ150.

Application: Roofing and Wall Cladding
Finishes available: ZINCALUME® steel and limited COLORBOND® steel colours
BMT: 0.40, 0.35, 0.48, 0.55, 0.60 mm



ZINCALUME® Trimdek



COLORBOND® Trimdek Pool Blue


TRIMDEK				
CODE No.		SIZE	UNIT WEIGHT	UOM
10-05-140	ZINCALUME®	0.40mm x 760mm	3.12	Meter
10-05-160		0.60mm x 760mm	3.70	Meter
10-25-0XX	COLORBOND®	0.40mm x 760mm	3.16	Meter
10-25-09X		0.35mm x 760mm	2.79	Meter
10-35-0XX		0.48mm x 760mm	3.73	Meter
10-40-0XX		0.55mm x 760mm	4.27	Meter

Weatherboard

Available Standard:

AS 1397 : 2011 Grade G300 Coating AZ150.
AS/NZ 2728 : 2013 AS1397 : 2011 G300 Coating AZ150.

Application: Wall Cladding
Finishes available: ZINCALUME® steel and limited COLORBOND® steel colours
BMT: 0.40, 0.55mm



WEATHERBOARD				
CODE No.		SIZE	UNIT WEIGHT	UOM
10-05-250	ZINCALUME®	0.40mm x 300mm	3.12	Meter
10-05-300		0.55mm x 300mm	3.70	Meter
12-68-0XX	COLORBOND®	0.40mm x 300mm	1.02	Meter
12-70-0XX		0.55mm x 300mm	1.71	Meter
12-71-0XX		0.40mm x 300mm	1.02	Meter

Weatherboard Lower Clip 1.55 Galv.



Weatherboard Lower Clip 1.55 Galv.


CODE No.	DESCRIPTION	UNIT WEIGHT	UOM
10-05-140	Weatherboard Lower Clip 1.55 Galv	0.02	Each

Kliplok

Available Standard:

AS 1397 G300 Coating AZ150
AS/NZ 2728 : 2013 Coating AS1397 : 2011 G300

Application: Roofing and Wall Cladding
Finishes available: ZINCALUME® steel and limited COLORBOND® steel colours
BMT: 0.40, 0.55 mm

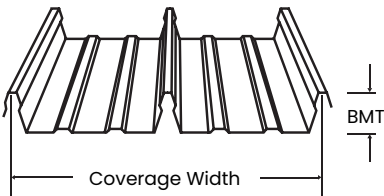

ZINCALUME® Kliplok



COLORBOND® Kliplok: Cloudy Grey

KLIPLOK				
CODE No.		DESCRIPTION	UNIT WEIGHT	UOM
10-05-406	ZINCALUME®	0.55mm x 406mm	2.06	Meter
10-43-XXX	COLORBOND®	0.40mm x 700mm	3.16	Meter
10-45-0XX		0.55mm x 406mm	2.63	Meter

Kliplok Clips KL65



Kliplok Clips KL65


CODE No.	DESCRIPTION	UNIT WEIGHT	UOM
10-80-020	Kliplok Clips KL65	0.14	Each

V Crimp

Available Standard:

AS 1397 G300 Coating AZ150
AS/NZ 2728 : 2013 Coating AS1397 : 2011 G300

Application: Roofing and Wall Cladding
Finishes available: ZINCALUME® steel and limited COLORBOND® steel colours
BMT: 0.35, 0.40, 0.48 mm

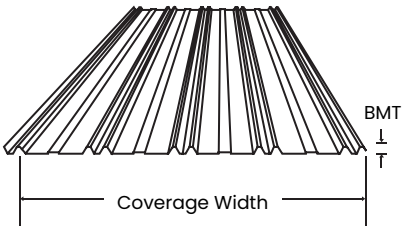

ZINCALUME® V Crimp



COLORBOND® V Crimp
Pale Eucalypt


V CRIMP				
CODE No.		SIZE	UNIT WEIGHT	UOM
10-05-501	ZINCALUME®	0.40mm x 800mm x 1.800m	5.61	Each
10-05-502		0.40mm x 800mm x 2.100m	6.54	Each
10-05-503		0.40mm x 800mm x 2.400m	7.48	Each
10-05-504		0.40mm x 800mm x 2.700m	8.41	Each
10-05-505		0.40mm x 800mm x 3.000m	9.35	Each
10-05-506		0.40mm x 800mm x 3.300m	10.28	Each
10-05-507		0.40mm x 800mm x 3.600m	11.21	Each
10-05-800		0.40mm x 800mm	3.12	Meter
10-40-0XX	COLORBOND®	0.55mm x 850mm	4.27	Meter
12-65-0XX		0.40mm x 800mm	3.16	Meter
12-65-09X		0.35mm x 800mm	2.79	Meter
12-67-0XX		0.48mm x 800mm	3.73	Meter

Panel Rib

Available Standard:

AS 1397 G300 Coating AZ150
AS/NZ 2728 : 2013 Coating AS1397 : 2011 G300

Application: Walling - External and Internal
Finishes available: ZINCALUME® steel and limited COLORBOND® steel colours.
BMT: 0.40, 0.55 mm

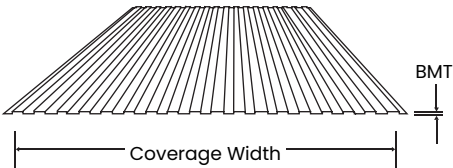



ZINCALUME®
Panelrib



COLOBOND®
Panelrib Sign White

PANELRIB				
CODE No.	PROFILE	SIZE	UNIT WEIGHT	UOM
10-05-850	ZINCALUME®	0.40mm x 850mm	3.21	Meter
10-05-851		0.40mm x 850mm x 1.8m	5.78	Each
10-05-852		0.40mm x 850mm x 2.1m	6.74	Each
12-40-0XX	COLORBOND®	0.55mm x 800mm	4.27	Meter
12-60-0XX		0.40mm x 850mm	3.16	Meter
112-60-09X		0.35mm x 850mm	2.79	Meter
12-61-0XX		0.48mm x 850mm	3.73	Meter

Ples Kapa

Available in Zincalume.

Note: All lengths are Custom Made.

CODE No.	PROFILE	SIZE	UNIT WEIGHT	UOM
10-50-035	Custom Orb	0.35mm x 940mm	2.73	Meter
10-60-035	Trimdek		2.73	Meter
10-70-035	V Crimp		2.73	Meter
10-80-035	Panelrib		2.73	Meter

Clear Roofing

All lengths are supplied in their standard lengths and are Coolite Gel Coated.



Clear Roofing - Trimdek

CODE No.	PROFILE	STANDARD LENGTH (m)	UNIT WEIGHT	UOM
20-05-001	Custom Orb - Coolite Gelcoated	1800gsm x 5.49-M	8.78	Sheet
20-05-002		2400gsm 3.600-M	7.20	Sheet
20-05-006	Trimdek	1800gsm 5.490-M	8.78	Sheet
20-05-010	Custom Orb Clear Roofing	1800gsm 5.490-M	8.78	Sheet
20-05-012		1800gsm 2.700-M	4.32	Sheet
20-05-014		1800gsm 3.600-M	5.76	Sheet
20-05-020	Ampelite Kliplok	1800 gsm x 1m	0.98	Meter

Flat Sheet

Available in ZINCALUME, GALVANISED and COLORBOND.



ZINCALUME®
Flat Sheet

ZINCALUME® AS 1397: 2011 - Grade G300, G550 Coating AZ150.

ZINCALUME FLAT SHEETS			
CODE No.	SIZE	UNIT WEIGHT	UOM
50-20-005	0.40mm x 940mm	3.12	Meter
50-20-008	0.60mm x 938mm	4.39	Meter
50-40-005	0.40mm x 1200mm	4.12	Meter
50-40-015	0.60mm x 1200mm	6.00	Meter
50-40-025	0.80mm x 1200mm	6.00	Meter
50-40-035	1.20m x 1200mm	5.00	Meter

GALVANISED AS 1397:2021 - Grade G250 Z275.

GALVANISED FLAT SHEETS			
CODE No.	SIZE	UNIT WEIGHT	UOM
50-35-002	0.40mm x 900mm	3.09	Meter
50-35-004	0.60mm x 900mm	4.50	Meter
50-35-005	0.40mm x 1200mm	4.50	Meter
50-35-015	0.60mm x 1200mm	6.00	Meter
50-35-025	0.80mm x 1200mm	7.88	Meter
50-35-035	1.00mm x 1200mm	9.77	Meter
50-35-050	1.20m x1200mm	11.65	Meter
50-35-060	1.60m x 1200mm	15.42	Meter
50-35-065	2.00m x 1200mm	0.00	Meter

COLORBOND® AS 1397: 2011 - Grade G300, G550 Coating AZ150.

COLORBOND FLAT SHEETS			
CODE No.	SIZE	UNIT WEIGHT	UOM
50-20-0XX	0.40mm x 940mm	3.16	Meter
50-30-0XX	0.60mm x 938mm	4.00	Meter
50-45-0XX	0.55mm x 938mm	4.27	Meter
50-50-0XX	0.55mm x 1200mm	5.00	Meter



Bondek Decking

An efficient, versatile and robust structural decking and ceiling system for concrete slabs. It is a highly regarded formwork product offering efficiency and speed of construction.

- Excellent spanning capacities for greater strength and less deflection
- Acts as a permanent formwork
- Works as composite slab saving on concrete and reinforcement costs
- Features slip free embossments and ribs at 200mm centres meaning a safe work platform.


Available Standard: **AS 1397 Grade G550 Coating Z275**

Application: Structural Decking and Ceiling
Finishes available: GALVANISED
BMT: 0.75, 1.00 mm

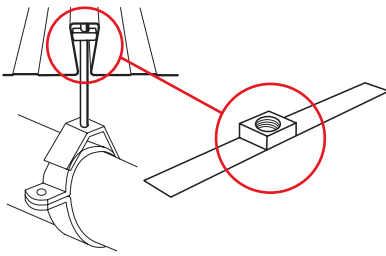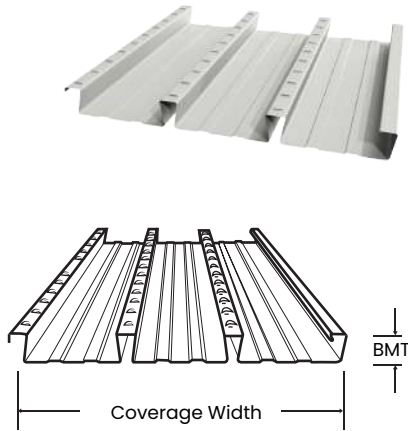

Bon-Nut Threaded
A heavy duty square nut adhered to paper for easy installation into the Bondek ribs, to carry suspended ceilings or services.

Available to suit M8 threaded rods.
Maximum allowable load is 430kg.

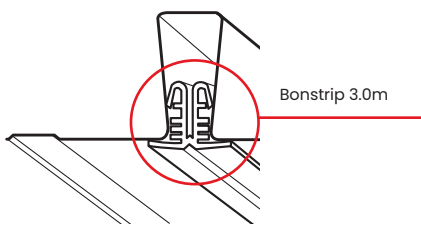

Bonstrips
A Plastic trim to cover gaps formed by ribs.



Used when the underside of bondek forms an exposed ceiling. Stock length: 3000mm. Allows plasterboard to be fixed to bondek.

BONDEK & ACCESSORIES			
CODE No.	DESCRIPTION	UOM	UNIT WEIGHT
20-30-001	Bondek 0.75BMT (590mm Cover)	Meter	
20-30-002	Bondek 1.00BMT (590mm Cover)	Meter	
20-30-005	Bondek 0.75BMT (590mm Cover) (6m stock length)	Length	
20-30-010	Bondek 1.00BMT (590mm Cover) (6m stock length)	Length	
20-30-015	Bonwedge Plate	Each	
20-30-020	Bon Nut Threaded 8mm	Each	
20-30-030	Bondek Infill Strip 1.2m	Each	
20-30-035	Bonstrips 3.0m	Each	
20-30-045	Bondek Ceiling Suspension Nuts	Each	


Purlins-Z and C Sections

Available Standard: **AS 1397:2011 Grade G450 Coating Z450.**

Note:
Can be Punched, Unpunched & Unpunch Non Lipped.

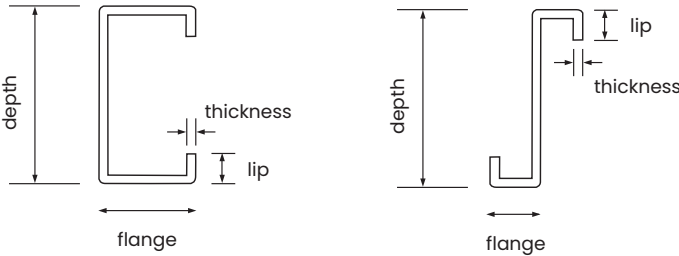


Bondek Infill Strip
A rib infill made from polystyrene, inserted into the Bondek ribs to stop concrete leaking and airflow.



Bonwedge Plate
Lightweight pressed metal wedge shaped bracket, which can be inserted into the Bondek ribs to support rods which carry suspended ceilings or services. Suits a 6mm rod.

Maximum allowable load is 100Kg.

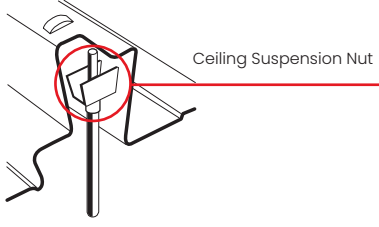

Ceiling Suspension Nut
A lightweight pressed metal suspension nut, which is inserted into the Bondek ribs to support a M6 threaded rod to carry suspended ceilings or services.


Maximum allowable load is 270Kg.



CODE No.		DESCRIPTION		THICKNESS	UNIT WEIGHT
C SECTION	Z SECTION	C SECTION	Z SECTION		
40-05-005		C08512 P Purlin G450 Zinc		1.20	1.81
40-15-005	40-45-005	C10016 P Purlin G450 Zinc	Z10016 P Purlins G450 Zinc	1.60	2.63
40-15-010	40-45-010	C15016 P Purlins G450 Zinc	Z15016 P Purlins G450 Zinc	1.60	3.61
40-15-015	40-45-015	C20016 P Purlins G450 Zinc	Z20016 P Purlins G450 Zinc	1.60	4.52
40-15-020	40-45-020	C25016 P Purlins G450 Zinc	Z25016 P Purlins G450 Zinc	1.60	5.21
40-20-005	40-50-005	C10020 P Purlins G450 Zinc	Z10020 P Purlins G450 Zinc	2.0	3.30
40-20-010	40-50-010	C15020 P Purlins G450 Zinc	Z15020 P Purlins G450 Zinc	2.0	4.52
40-20-015	40-50-015	C20020 P Purlins G450 Zinc	Z20020 P Purlins G450 Zinc	2.0	5.68
40-20-020	40-50-020	C25020 P Purlins G450 Zinc	Z25020 P Purlins G450 Zinc	2.0	6.54
40-20-025		C30025 P Purlins G450 Zinc		2.5	10.56
40-25-005	40-55-005	C15025 P Purlins G450 Zinc	Z15025 P Purlins G450 Zinc	2.5	5.35
40-25-010	40-55-010	C20025 P Purlins G450 Zinc	Z20025 P Purlins G450 Zinc	2.5	6.29
40-25-015	40-55-015	C25025 P Purlins G450 Zinc	Z25025 P Purlins G450 Zinc	2.5	7.69
40-28-005	40-58-005	C08512 U Purlins G450 Zinc	Z08512 U Purlins G450 Zinc	1.2	1.81
40-28-006		C08512 U Purlins G450 Zinc "Non Lipped"		1.2	1.81
40-30-005	40-60-005	C10016 U Purlins G450 Zinc	Z10016 U Purlins G450 Zinc	1.6	2.63
40-30-006		C10016 U Purlins G450 Zinc "Non Lipped"		1.6	2.63
40-30-010	40-60-010	C15016 U Purlins G450 Zinc	Z15016 U Purlins G450 Zinc	1.6	3.61
40-30-011		C15016 U Purlins G450 Zinc "Non Lipped"		1.6	3.61
40-30-015	40-60-015	C20016 U Purlins G450 Zinc	Z20016 U Purlins G450 Zinc	1.6	4.52
40-30-016		C20016 U Purlins G450 Zinc "Non Lipped"		1.6	4.52
40-30-020	40-60-020	C25016 U Purlins G450 Zinc	Z25016 U Purlins G450 Zinc	1.6	5.21
40-30-021		C25016 U Purlins G450 Zinc "Non Lipped"		1.6	5.21
	40-65-005		Z10020 U Purlins G450 Zinc	2.0	3.30
	40-65-010	Z15020 U Purlins G450 Zinc		2.0	4.52

Fascia Purlins

Available Standard: AS 1397:2011 Grade G450 Coating Z450.



CODE No.	DESCRIPTION	SIZE	THICKNESS	UNIT WEIGHT
40-80-005	Fascia P Purlins G450 Zinc	150	1.60mm	3.61
40-80-010	Fascia P Purlins G450 Zinc	200	1.60mm	4.52
40-80-015	Fascia P Purlins G450 Zinc	230	1.60mm	5.21
40-80-020	Fascia P Purlins G450 Zinc	250	1.60mm	5.21
40-80-030	Fascia P Purlins G450 Zinc	250	1.60mm	6.54
40-80-105	Fascia P Purlins G450 Zinc	150	2.00mm	4.52
40-80-110	Fascia P Purlins G450 Zinc	200	2.00mm	5.68
40-80-115	Fascia P Purlins G450 Zinc	250	2.00mm	6.54
40-80-120	Fascia P Purlins G450 Zinc	250	2.00mm	7.69



By doing business with

Atlas Steel - P.n.g

you're supporting PNG!

Standard Colours

Colorbond®

Surf Mist



Classic Cream



Cloudy Grey



Pool Blue



Torres Blue



Deep Ocean



Wheat



Pale Eucalypt



Cottage Green



Paperbark



Woodland Grey



Windspray



Tuscan Red



Pioneer Red



Dune



Digicel Red



Stone Beige



Ironstone



LAE 472 1104

sales.lae@atlassteelpng.com.pg



POM 321 1233

sales.pom@atlassteelpng.com.pg

www.atlassteelpng.com.pg